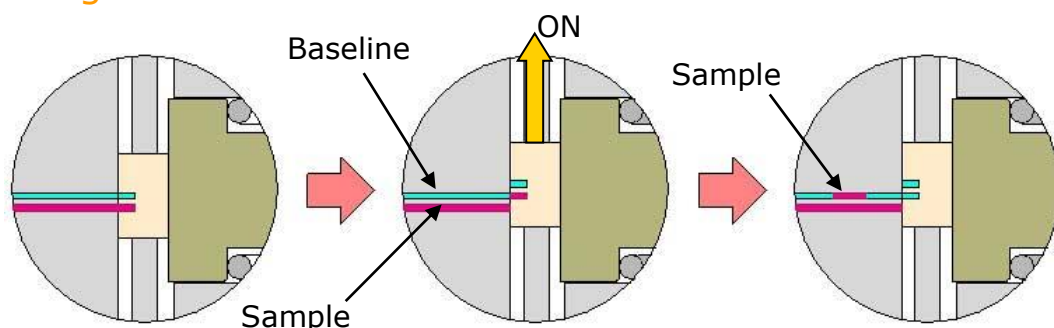


For liquid chromatography

Solenoid-driven Sample Injector

This is a solenoid driven injector for injecting a small volume of samples into a baseline in various analytical instruments, such as those for liquid chromatography. As it is driven by a solenoid, it is more economical and easier to operate compared to a conventional stepper motor driven injector.

Image of the internal structure**Features**

- Volume of injection variable from 0.2 to 1.0 μ l
- Small with outer dimensions of L39.1 x W30 x H62.5 mm
- Controlled just by the ON and OFF operations of a DC power supply

Specifications

Operating Pressure Range	0 - 300kPa
Port Connection	10-32UNF (Standard)
Voltage	12VDC, 24VDC
Power Consumption	18W
Duty Cycle	Intermittent (ED=15%)
Max. Continuous Energising Time	45 s
Wetted Materials	PTFE, PEEK, Al ₂ O ₃
Lifetime	100 thousand operations (Experimental result)

Note: Specifications etc. may be changed at any time without notice.

TAKASAGO ELECTRIC, INC.

66 KAKITSUBATA, NARUMI-CHO, MIDORI-KU, NAGOYA, 458-8522 JAPAN

Tel +81-52-891-2301 Fax+81-52-891-7386

E-mail: info@takasago-elec.co.jp URL: <http://www.takasago-fluidics.com/>