


TFS For liquid chromatography

Solenoid-driven Sample Injector



This is a solenoid driven injector for injecting a small volume of samples into a baseline in various analytical instruments, such as those for liquid chromatography. As it is driven by a solenoid, it is more economical and easier to operate compared to a conventional stepper motor driven injector.

Image of the internal structure

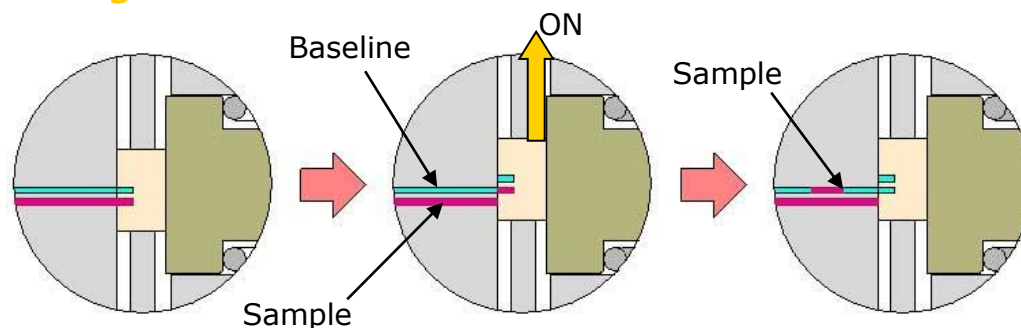

Features

- Volume of injection variable from 0.2 to 1.0 μ l
- Small with outer dimensions of L39.1 x W30 x H62.5 mm
- Controlled just by the ON and OFF operations of a DC power supply

Specifications

Operating Pressure Range	0 - 300kPa
Port Connection	10-32UNF (Standard)
Voltage	12VDC, 24VDC
Power Consumption	18W
Duty Cycle	Intermittent (ED=15%)
Max. Continuous Energizing Time	45 s
Wetted Materials	PTFE, PEEK, Al ₂ O ₃
Lifetime	100 thousand operations (Experimental result)

Note: Specifications etc. may be changed at any time without notice.

Contact for Purchase

TFS (Takasago Fluidic Systems)

1900 West Park Drive, Suite 280, Westborough, MA 01581 U.S.A.

Tel:+508-983-1434 FAX:+508-983-1401

E-mail: info@takasago-fluidics.com URL: <http://www.takasago-fluidics.com/>